

Fury Heavy Duty Gas Water Heaters now with the Guardian System™



Available in 60 and 75 Gallon Gas Models

► 6-Year Limited Tank Warranty, 1-Year Limited Parts Warranty*

Guardian System™

- One-of-a-kind air/fuel shut-off device offers double protection
- Maintenance free – no filter to clean
- Standard replacement parts

Environmentally Friendly Burner

- Low NOx design for low nitrous oxide emissions

Self-Cleaning (60 gallon model only)

- EverKleen™ patented system fights sediment build-up
- Reduces fuel costs
- Provides more hot water

Easy to Light

- No matches required

Energy Efficient

- More hot water at low operating cost

Longer Life

- Patented magnesium anode rod design incorporates a special resistor that protects the tank from corrosion

High Altitude Compliant

- 60 and 75 gallon models are certified for applications up to 7,700 feet above sea level

Plus...

- Brass drain valve and temperature and pressure relief valve are included
- Meets or exceeds National Appliance Energy Conservation Act (NAECA) requirements

*See Residential Warranty Information Brochure for complete warranty information.

Energy Factor and Average Annual Operating Costs based on D.O.E. (Department of Energy) test procedures.




DESCRIPTION		FEATURES						ROUGHING IN DIMENSIONS (SHOWN IN INCHES)								ENERGY INFO.	
GAL. CAP.	MODEL NUMBER	GAS INPUT IN THOUS. BTU/HR.		RECOVERY IN G.P.H. 90° RISE		FIRST HOUR DEL. G.P.H.		HT. TO VENT A	TANK HT. B	DIAM. C	HT. TO GAS CONN. D	VENT SIZE E	WATER CONN. CNTR. F	HT. TO SIDE T&P G	WATER CONN. H	SHIP. WT. (LBS)	ENERGY FACTOR
		NAT.	LP	NAT.	LP	NAT.	LP										
60	RR60-51FV	50	50	50.5	50.5	107	107	62	58	23	13-1/4	4	8	48-1/2	3/4	180	0.56
75	RR75-75FV	75.1	65	75.8	67.7	141	109	64	60	26-1/4	14-3/4	4	11	53-1/4	1	320	0.53†

SPECIFY LP GAS WHEN ORDERING. Add "P" suffix to the model number: Example: RR60-51FV

- 60 and 75 gallon models meet SCAQMD rule 1121 or SCAQMD rule 1146.2.
- 75 gallon model features side water connections for space heating applications.


† Energy Factor for 75 gallon LP model.

Rheem Guardian System Features...




Exclusive Combustion Shut-off System

Should a spill incident occur, the Guardian System shuts off the gas supply and the air supply preventing a sustained vapor burn in the combustion chamber.




Flame Arrestor Plate

A specially-designed flame arrestor prevents ignition of vapors outside the combustion chamber.



Maintenance Free

Superior air filtration prevents the flame arrestor from becoming clogged by lint, dust and oil.

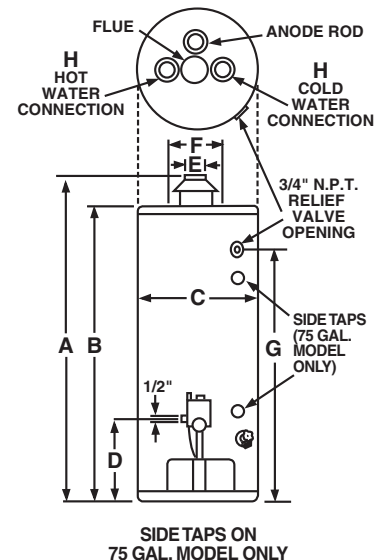

These units are designed to meet or exceed ANSI (American National Standards Institute) requirements and have been tested according to D.O.E. test procedures and meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria for energy consuming appliances.

Before purchasing this appliance, read important energy cost and efficiency information available from your supplier.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Manufacturing Company • Water Heater Division
Rheem Canada Ltd./Ltée, 128 Barton Street West, Hamilton, Ontario L8N 3P3